

OSKF

Current Transformers
72.5 kV to 765 kV

For years, network managers have trusted our OSKF current transformers and thousands are installed in substations around the world. Our customers recognize our top-of-the-line CTs for their long-term strength, safety and reliability for system voltages up to 800 kV.

Long service life and near zero maintenance

OSKF current transformers have been designed for a 30 year lifetime and, thanks to the soundness of our technical concepts, many well out-live this service life.

They have near-zero maintenance requirements: the oil is hermetically sealed from the air by a stainless steel diaphragm assembly and all external parts are of corrosion-resistant material.

Designed to meet our customers highest expectations



Customer Benefits

- Extensive field experience, including highly seismic regions
- Special accuracy classes for protection: TPS, TPX, TPY, TPZ, PR
- Mineral oil-filled: no PCB
- Operational security
- Stable accuracy over a long period of time
- Built for long life with near zero maintenance

☐ Metering – Protection

☐ Performance:

- Un: 72.5 to 765 kV
- In: up to 5000 A
- In short-circuit: up to 80 kA1" (Isc dyn: 200 kA peak)
- Secondary cores: up to 8

☐ Characteristics:

- High quality paper-oil insulation
- Top core design with metal head
- Oil expansion by stainless steel diaphragm bellows
- Oil level indicator
- Secondary cores in aluminum box
- Changing of primary ratio by primary series-parallel connection (double or triple ratio) or by secondary taps.

☐ Seismic withstand capability:

standard design up to 0.5g (higher values on request)

- ☐ Compliance with IEC, ANSI/IEEE or equivalent standards. Other standard on request.


Linking the power chain

Top core design and primary windings

The 'inverted CT' design, with active parts in the head, offers particular advantages for higher currents. The primary is normally a straight bar type conductor.

Ratio change can be accomplished either by primary series-parallel connection (double or triple ratio) or by secondary taps. Combinations of series-parallel connection and secondary taps are also possible. This maintains the output and accuracy of the secondaries at all ratios.

The top core design also has the advantage of spreading the primary winding in a uniform and symmetrical way around the cores, avoiding local saturation and reducing the leakage flux.

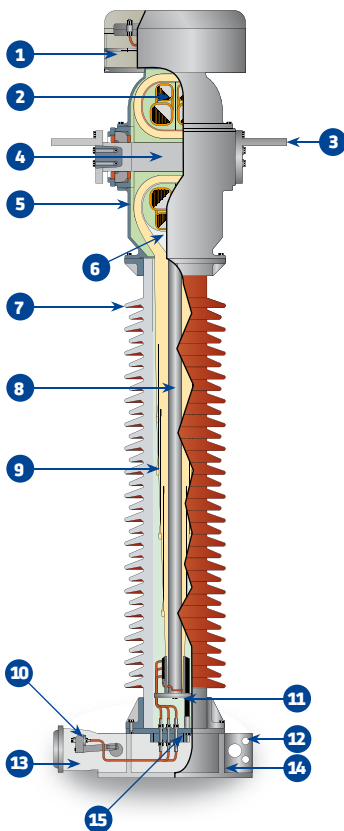

Cores and secondary windings

Current transformers can have several toroidal laminated cores which are independent of each other. The cores with the secondary winding are accommodated in a thick-walled, round core aluminum protection.

The core housing is connected to a strong metal pipe inside the insulator which leads to the base plate. Cross sections and connections have been dimensioned in such way that the current can be led to the ground in case of internal failure, avoiding an arc inside the insulator.

1. Diaphragm bellows
2. CT cores
3. HV primary terminal
4. Primary conductor assembly
5. Head housing
6. Core housing
7. Porcelain insulator
8. Bushing tube
9. Capacitive grading layers
10. Secondary terminal blocks
11. Fault current carrying connector to ground
12. Ground pad
13. Secondary terminal box
14. Base assembly
15. Sealing plate

High quality paper-oil insulation

Insulating paper is applied to the core housing and its supporting tube by a special wrapping machine to ensure high density and uniform insulation.

An extremely low residual humidity is obtained by a special paper insulation drying process.

Grading layers with well-rounded edges give a uniformly distributed field over the entire unit.

Only the highest quality mineral oil with excellent durability and gas-absorbing properties is used. The insulating oil contains no PCB.

Controlled vacuum and temperature treatments withdraw humidity and gas from the paper insulation and insulation oil; the impregnation process results in a high-grade dielectric system.

Hermetically sealed for long life

The OSKF maintains a completely sealed and pressure free system through the use of a stainless steel metallic diaphragm assembly. The diaphragm assembly provides oil expansion and pressure compensation, protects the interior from air and moisture and preserves the dielectric strength of the unit. The movements of the diaphragm assembly are translated to an indirect oil level indicator which is visible behind a window in the diaphragm cover.

Leakproof design

The head housing is made of corrosion-proof aluminum alloy. Every housing is subjected to a vacuum leak test by helium leak detection. An overall leak test is performed on every completely assembled unit before oil filling.

Primary terminals

The standard primary terminals consist of aluminum flat terminal pads with 4, 6, 8, or more holes. On request, single or double round terminals made of nickel-plated-copper can be provided.

Secondary terminal box

The terminal box is very spacious and has a removable plate located at the bottom which allows for in-factory or on-site drilling of the conduit entrances for the insertion of cable glands as desired.



Insulator

The outer insulation consists of high-quality oxide porcelain in brown (RAL 8016) or grey (ANSI 70). Standard creepage distances are available according to the dimension tables. Larger creepage distances and composite insulators are available on request.

Protection against bursting

The optimized insulation structure and appropriate structural measures secure the high-grade dielectric for a very long time. The following additional measures are taken to prevent the porcelain from bursting in the event of an inner insulation breakdown, e.g., in case of lightning strikes:

- The active part is above the porcelain in an aluminum head housing.
- An internal fault current connection is provided between the core housing and the ground terminal on the base.
- A pressure relief plate exists in the area of the expansion body on the head.
- Upon request, a composite insulator consisting of fiberglass reinforced pipe and silicone rubber screens can be provided instead of the porcelain insulator.

Earthquake-proof design

The standard OSKF resists medium intensity seismic events. More stringent seismic design requirements can be met upon special request.



Testing

Testing is in conformance with national and international standards. Along with the power-frequency test, capacitance, dielectric loss factor and inner partial discharges are also measured as routine tests. Tests certificates are issued and supplied with the equipment.

Additional information

- **Dielectric loss factor:**
Tan δ smaller than 0.005 up to the power-frequency test voltage
- **Radio Influence Voltage (RIV):**
Less than 2500 μV at A.1 Um
- **Internal partial discharge:**
Less than 10 pC at 1.2 Um
- **Frequency:**
50 Hz or 60 Hz or 16 2/3 Hz.
Other value on request.
- **Ambient temperature:**
-35°C...+40°C on a 24h average.
Other designs can be provided upon request for temperatures ranges falling outside of the mentioned range, i.e. -50°C to +50°C
- **Mechanical strength:**
According to IEC 60044-1.
Other values on request.

Dimensions

The following dimensions refer to standard versions. Other U_m values affect other dimensions.

The head size can change, depending on the core data and the primary nominal current. With regard to the creepage distance and clearance, the insulator can be adapted to the customers' request.

Dimensions				
Type		OSKF 72.5	OSKF 123	OSKF 145
Head size		1	1	3A
Maximum system voltage (U_m)	kV	72.5	123	123
Impulse test voltage (BIL)	kV	350	550	550
Standard creepage distance (*)	mm	1440	2590	3520
Dimensions mm	A	1630	2055	2395
	B	1260	1690	1900
	C	590	1020	1125
	D	260	260	285
	E	740	740	900
	F	450	450	450
Total weight (approx.)	kg	245	285	490
Weight of oil (approx.)	kg	43	49	105


Indicatives value only - All indicated dimensions must be confirmed with order.
 (*) - Standard creepage distance (mm) - Other value on request.

Inquiry check list

- Applicable standards
- Rated frequency
- Highest system voltage
- Test voltages (power frequency, lightning impulse)
- Primary/secondary rated currents
- Short time current and duration
- Core rating (burden, accuracy)
- Environmental conditions (altitude, temperatures, pollution, seismic conditions...)
- Options:
 - Composite insulator
 - Surge arrester on secondary winding
 - Ground cable connector
 - Primary terminal
 - Specific design for use in highly active seismic regions
- Available accessories:
 - Tg δ tap
 - Oil sampling valve
 - Lifting bar
 - Oil sampling tools kit
 - Shock indicators during shipment

Dimensions											
Type		OSKF 170	OSKF 245	OSKF 362	OSKF 420			OSKF 550		OSKF 765	
Head Size		3A	3A	3A	4	3A	4	5	4	5	6
Maximum system voltage (U_m)	kV	170	245	362	362	420	420	420	550	550	765
Impulse test voltage (BIL)	kV	750	1050	1300	1300	1425	1425	1425	1800	1800	2100
Standard creepage distance (*)	mm	4425	5170	7900	7900	9960	9960	9960	11800	11800	13180
Dimensions mm	A	1620	3530	4525	4800	5275	5590	5970	6035	6500	7420
	B	2120	2900	3890	3965	4635	4755	4815	5200	5340	6050
	C	1350	2030	3025	2995	3765	3765	3765	4210	4210	4720
	D	285	385	385	330	375	370	370	370	370	480
	E	900	900	900	935	900	935	1075	935	1075	1210
	F	450	600	600	600	900	900	900	900	900	1200
Total weight (approx.)	kg	505	775	1010	1270	1395	1620	1950	1900	2450	3700
Weight of oil (approx.)	kg	108	190	225	295	340	420	520	450	550	900

Indicatives value only - All indicated dimensions must be confirmed with order.
 (*) - Standard creepage distance (mm) - Other value on request.

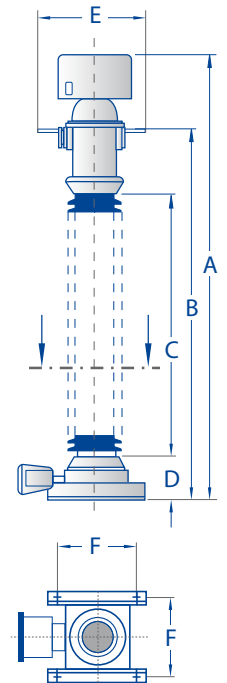

Alstom Grid Worldwide Contact Centre
www.grid.alstom.com/contactcentre
 Tel.: +44 (0) 1785 250 070
www.grid.alstom.com

GRID

ALSTOM

Grid-ITR-13-OSKF-71494-V2-2011-03-EN - © - Alstom Grid - 2011. Alstom Grid, the Alstom Grid logo and any alternative version thereof are trademarks and service marks of Alstom Grid. All trade names or trademarks mentioned herein whether registered or not, are the property of their owners. - 389191982 RCS PARIS Our policy is one of continuous development. Accordingly the design of our products may change at any time. Whilst every effort is made to produce up to date literature, this brochure should only be regarded as a guide and is intended for information purposes only. Its contents do not constitute an offer for sale or advise on the application of any product referred to in it. We cannot be held responsible for any reliance on its contents taken on its contents without specific advice.