




# ST-19A Demountable Air Spider

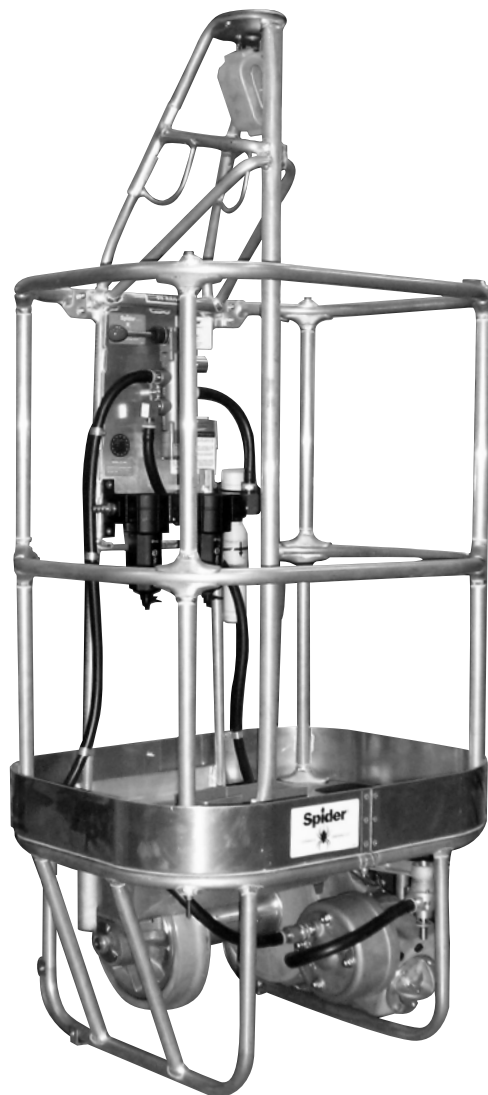

All the same performance benefits of the ST-17 in a demountable platform for easy no-tools disassembly to pass through a 20 in. (508 mm) opening.

- Bolted, lightweight aluminum frame quickly disassembles, making it ideal for limited access work in boilers, digesters, grain elevators, ships, tanks and stacks.
- Air powered motor
- Reliable vented transmission prohibits entry of corrosive agents for greater durability.
- Reinforced midair transfer point and wear plates at base
- Optional 2 ft (0.6 m) SA-1052 and 3 ft (0.9 m) SA-1053 flydecks

*For welding installation details, see pages 68-70.*

<b>Specifications: ST-19A</b>
<b>Gross Load Capacity:</b> 1,000 lbs. (453.6 kg)
<b>Dimensions:</b> 30 x 23 x 70 in. (762 x 584 x 1,778 mm)
<b>Weight:</b> 205 lbs. (93 kg)
<b>Travel Speed:</b> 30 ft/min (9.2 m/min)
<b>Power Requirements:</b> 120 psi air @ 60 cfm
<b>Wire Rope Capacity:</b> 350 ft (106.7 m)
<b>Wire Rope Size and Construction:</b> 5/16 in. (8 mm) Seale Construction 6 x 19
<b>Construction:</b> Aluminum and steel

See drawing on page 55.

**For more information, call: 1-877-774-3370**