

# Specifications

## DR240 Main Unit

- Stand-alone model (DR241) or Expandable model (DR242)

## DR240 Subunit

- DS400 or DS600

### General Specifications

- External Dimensions; Weight (with I/O module installed)  
DR241: approximately 444 (W)×288 (H)×343 (D) mm; approximately 16 kg  
DR242: approximately 444 (W)×288 (H)×308 (D) mm; approximately 12 kg  
DS400: approximately 336 (W)×165 (H)×100 (D) mm; approximately 2.5 kg  
DS600: approximately 422 (W)×176 (H)×100 (D) mm; approximately 3.5 kg
- AC Power Supply  
Rated supply voltage: 100 to 240 VAC  
Usable supply voltage: 90 to 250 VAC  
Rated supply frequency: 50/60 Hz
- DC power supply (Runs on a DC power supply only. Specify when ordering.)  
Rated supply voltage: 12 to 28 VDC  
Usable supply voltage: 10 to 32 VDC  
Terminal: Screw terminals
- Insulation Resistance  
At least 20 MΩ at 500 VDC between the power supply and ground, between each terminal and the ground, and between input terminals
- Withstanding Voltage  
Between power supply terminal and ground: 1,500 VAC (50/60 Hz, 1 min.)  
Between input/output terminal and ground: 1,500 VAC (50/60 Hz, 1 min.)
- Normal Operating Conditions  
Supply frequency: 50 Hz ±2% or 60 Hz ±2%  
Ambient temperature: DR241, DR242 0 to 50°C (FD operation 5 to 40°C)  
DS400, DS600 Panel mount -10 to 60°C  
Desk-top -10 to 50°C
- Ambient humidity: 20 to 80% RH (between -10 and 40°C)
- Safety Standards  
CSA C22.2 No.1010.1-92, IEC1010-1:1995, EN61010
- EMI Standard  
EN55011:1991, Group 1 class A
- EMC Standard  
EN50082-2:1995

### System Configuration

- Configuration Method  
DR241: Configure a system with this model by specifying necessary options, such as the input and communications functions, according to the model code when ordering.
- DR242: Configure a system with this model by combining one or more of the modules and subunits listed below.

### Connecting Modules and Subunits (DR242)

- Standard Modules and Software for System Configuration  
The following modules and software can be installed in a main unit and subunit to configure a data acquisition system.
- Input Modules: Universal (DCV, TC, RTD and DI), DCV/TC/DI dedicated, power monitor, strain, pulse, direct current (mA) and digital input modules  
Connectable to DS400 and DS600
- Communications Modules: Ethernet, GP-IB, RS-232C and RS-422A/485  
Connectable to DR242 main unit
- Alarm Contact Output Modules: 4 contacts (SPDT: NO-C-NC) and 10 contacts (make contact: NO-C).  
Connectable to DR242 main unit or DS400 and DS600
- DI/DO Modules: Two alarm output contacts (NO-C-NC) and fail output  
Connectable to DR242 main unit or DS400 and DS600  
Up to 1 module/1 system can be connected.
- Extension Modules: Interfaces for remote power supply  
One extension module can be connected to each DS400 and DS600.  
(should be used with extension base units)  
DAQ32 (Standard software)  
DAQ32 plus (Optional software)
- Software: DAQ32 (Standard software)  
DAQ32 plus (Optional software)
- Types and Number of Modules That Can Be Connected  
DR241: Specify the types of modules and the number according to the model code.
- DR242: Communications module DI/DO module or alarm contact output module
- DS400/600 Input module, alarm contact output modules, DI/DO modules and extension modules  
Four or six modules can be connected.
- Connection of Subunits  
DR241: Cannot be connected.
- DR242: Up to 6 subunits can be connected. One subunit can be installed on the rear panel by screws.

### Input Section

- Number of Input Channels  
DR241: 10 to 30 channels (Specify the number of channels when ordering)
- DR242: Power monitor input option: 2 or 6 channels  
0 channel. Expandable up to 300 channels by connecting subunits.
- Types of Input Modules  
DR241: Universal (DC voltage, thermocouple, RTD and contact), DCV/TC/DI dedicated (Specify the types when ordering), power monitor option
- DR242: Universal (DC voltage, thermocouple, RTD and contact), DCV/TC/DI dedicated, power monitor, strain, pulse, direct current (mA) and digital input modules
- Measurement Range:  
See the specifications for each input module.
- Measurement Interval:  
DR241: 0.5, 1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30 and 60 seconds  
DR242: Maximum of 2 s per 30 channels  
Maximum of 500 ms per 300 channels (including the subunit)

The measurement interval is dependent on the slowest input module if input modules of different measurement intervals are connected at the same time.

- A/D Integration Period  
Manual selection or automatic switchover between 20 ms (50 Hz), 16.7 ms (60

- Hz) and 100 ms (10 Hz)  
Minimum measurement interval when the 100-ms integration mode becomes:  
DR241: 30 channels; 6 seconds  
DR242: 4 seconds per 300 channels (including the subunit)  
(depends on the modules and number of channels)

### Recording section (DR241/242 main unit)

- Recording Method  
Raster scan method, 10-color wire dot recording
- Number of Recording Points  
300 points maximum (stand-alone model: 30 points + AC 6 points)
- Recording Paper  
Effective recording width: 250 mm (for analog trend measurement)
- Analog recording color (You can specify a color for each channel.)  
Purple, red, green, blue, brown, black, navy blue, yellow-green, red-purple, orange
- Analog Recording Interval  
FIX: Recording takes place at the specified measurement interval between 2 and 60 seconds (not all measured values are sampled for analog recording in case of the 0.5- and 1-second measurement intervals)  
Linked to recording paper feed speed

### AUTO:

- Recording Paper Feed  
Paper feed speed: 1 to 1,500 mm/hour

### Display Section

- Display Section  
Display: VFD display (5 x 7 dot matrix, 3 lines)  
Number of characters: 22 characters (large/1 line), 40 characters (2 lines)

### Memory Function Section

- Memory Media  
3.5-inch floppy disk drive with 512 kB SRAM buffer memory
- Data Capacity  
10 data/ch to 50 kdata/ch  
(Total data memory should be less than total memory length.)
- Applicable data  
Setting values, measurement values and computed values except report calculating values
- Memory Mode  
Binary  
Can be converted to ASCII (CSV) format for copying buffer memory data to floppy disk
- Sample Rate  
Synchronized with the measurement interval of the recorder unit, or synchronized with event.

### Alarms

- Number of Settings  
Up to four settings can be made for each channel.
- Kinds of Alarms  
Upper/lower limit, difference upper/lower limit, upper/lower limit of percentage change, upper or lower limit only for the results of computation  
Percentage change alarm time interval: 1 to 15 scans
- Number of Alarm Output Points  
DR241: 12 maximum (alarm option: 10; DI/DO option: 2)  
DR242: 300 in total

### Standard Computation Functions

- Kinds of Computation  
Difference between arbitrarily selected channels, linear scaling, moving average, pulse integration
- Scalable range: DC voltage, thermocouple, RTD, contact
- Scaling range: -30,000 to +30,000
- Moving average: 2 to 64 scans
- Pulse integration: Effective when a pulse input module is recognized (up to 60 channels)

### Fail, Chart End Output

- (DR expandable model. The DR stand-alone model uses the /R1 option.)  
Functions: Refer to the DI / DO modules.

## Optional Specifications

### Computation Function (/M1)

- Number of Computation Channels  
DR241: 30 channels maximum  
DR242: 60 channels maximum
- Kinds  
Remote RJC, four arithmetic operations, SQR (square root), ABS (absolute value), LOG (common or natural logarithm), EXP (exponential), statistics processing (CLOG, TLOG), logic (AND, OR, NOT, XOR), relative computation, previous data reference.
- CLOG: Mathematical processing within a group of data that was measured at the same time (total, maximum, minimum, average, max. - min.)
- TLOG: Mathematical processing of data from a certain channel over a period of time (24 hours maximum) (total, maximum, minimum, average max. - min.)

### Report Function (/M3)

- Instantaneous values of measured data, as well as maximum, minimum, average and total, for each hour, day or month are printed in tabular form on recording paper. Analog recording is interrupted while a report is being made.  
Report calculation channels: Up to 60 channels  
Note: This function does not allow the results of the report and computing function to be saved on floppy disks. (Thus, to be able to transfer the results to a personal computer, the DP380 report software is needed. Note that the DP380 software cannot be run simultaneously with the DAQ32 or DAQ32Plus software package.)

### Power Monitor Options (/N7, /N8)

- Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the power monitor module is sold separately.) Refer to the power monitor module.

### GP-IB Communications Option (/C1)

- Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the GP-IB module is sold separately.) Refer to the GP-IB module.

**RS-232C communications option (C2)**

● Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the RS-232C module is sold separately.) Refer to the RS-232C module.

**RS-422A/485 communications options (C3S)**

● Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the RS-422-A/485 modules are sold separately.)  
Refer to the RS-422A/485 module.

**Ethernet communication option (c7)**

● Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the Ethernet module is sold separately.) Refer to the Ethernet module.

**Alarm Contact Output Option (IA4)**

● Applicable Models and outline specifications  
DR241 stand-alone model (For the DR242, the alarm contact output module is sold separately.)  
Refer to the alarm output module.

**Recorder Function Remote Control Option (R1)**

● Applicable models and outline specifications  
DR241 stand-alone model (For the DR242, the DI/DO module is sold separately.)  
The DR242 expandable model incorporates fail and chart-end outputs as standard features.  
Refer to the DI/DO module.

**Input Module**

**Specifications Common to Input Module**

● Normal Operating Temperature/Humidity Range  
Universal, DCV/TC/DI input module: -10 to 60°C, 20 to 80% RH (non condensing)  
mA, power monitor, strain, except DU500-14 pulse input module: 0 to 50°C, 20 to 80% RH (non condensing)  
● Withstanding Voltage  
Between input terminals: 1,000 VAC (50/60 Hz) for one minute  
Strain input: 50 VDC (50/60 Hz, 1 minute except DU500-14)  
Between input terminal and ground: 1,500 VAC (50/60 Hz) for one minute

**Universal Input Modules**

**DCV/TC/DI Input Modules**

Module	Model	Number of Channels	Type of Terminal	Measurement Interval
Universal input	DU100-11	10	Screw	0.5 s
	DU100-12	10	Clamp	0.5 s
	DU100-21	20	Screw	2 s
	DU100-22	20	Clamp	2 s
	DU100-31	30	Screw	2 s
DCV/TC/DI input	DU100-32	30	Clamp	2 s
	DU200-11	10	Screw	0.5 s
	DU200-12	10	Clamp	0.5 s
	DU200-21	20	Screw	2 s
	DU200-22	20	Clamp	2 s
	DU200-31	30	Screw	2 s
	DU200-32	30	Clamp	2 s

● General Specifications  
Input method: Floating imbalance input, and inter-channel isolation RTD and pulse inputs are of the same potential within the same input module.  
A/D resolution: ±20,000  
A/D integration time: Manual selection or automatic switchover between 20 ms (50 Hz), 16.7 ms (60 Hz) and 100 ms (10 Hz)  
Measurement Range  
DC voltage range: 20 mV to 50 V  
Thermocouple: R, S, B, K, E, J, T, L, U, N, W, KP-Au7Fe  
RTD: Pt100, JPt100, Ni100, Ni120, Cu10, and J263\*B  
Contact input: Voltage-free contact input or voltage input  
Mixed input is allowed for DC voltage, thermocouple, RTD and contact inputs. (For an DCV/TC/DI input module, RTD input is not allowed.)  
Measurement accuracy: ±(0.05% of reading + 2 digits) (at 2-V range, 23 ±2°C and 55 ±10% RH)  
Noise rejection: By means of integrating A/D, low-pass filter or moving average  
Burnout: Detected within thermocouple-input range

**DC Current Input Modules**

Model	Number of channels	Type of Terminals	Measuring Interval
DU300-11	10	Screw	0.5 s
DU300-12	10	Clamp	0.5 s

● General Specifications  
Input method: Floating imbalance input, and inter-channel isolation Shunt resistor (100 Ω) is pre-installed.  
A/D resolution: ±20,000  
A/D integration time: Manual selection or automatic switchover between 20 ms (50 Hz), 16.7 ms (60 Hz) and 100 ms (10 Hz)  
Measurement range (resolution): ±20 mA (1μA)  
Noise rejection: By means of integrating A/D, low-pass filter or moving average

**Power Monitor Modules**

Model	Number of Channels	Type of Terminal	Measurement Interval
DU400-12	For single phase: one for voltage and one for current	Clamp	2 s
DU400-22	For 3 phases: three for voltage and three for current	Clamp	2 s

Input method: Transformer isolation  
Measured variables: Six items can be selected from the the following: RMS value of AC voltage/current, active power, apparent power, reactive power, frequency, power factor and phase angle (There is a restriction in combining selected items.)  
Measurement range (resolution):  
Voltage: 250 V (0.1 Vrms), 25 V (0.01 Vrms)  
Current: 5 A (0.001 Arms), 0.5 A (0.0001 Arms)

Measurement accuracy: ±(0.5% of span when RMSV and A are measured)  
Measured frequency: 45 to 65 Hz (all channels must have the same frequency)  
Crest factor: Up to 3  
Power integration: Calculated by M1 (computation function) option. /M1 must be specified for the DR240.

**Strain Measurement Modules**

Model	Number of Channels	Type of Terminal	Measurement Interval
DU500-12	10*, with built-in 120 Ω resistance	Clamp	0.5 s
DU500-13	10*, with built-in 350 Ω resistance	Clamp	0.5 s
DU500-14	10*, for external bridge box	NDIS	0.5 s

\*: 2 modules' width is required.

● General Specifications

Measurement range (resolution):  
2,000 με (0.1 με)  
20,000 με (1 με)  
200,000 με (10 με)  
Built-in bridge resistance: 120 Ω, 350 Ω, or none (for an external bridge box)  
Wiring: 1/4 bridge 1/2 bridge (neighbor), 1/2 bridge (opposite), full bridge  
Applicable gauge resistance: 1/4 or 1/2 bridge: 120 or 350 Ω  
Full bridge: 100 to 1,000 Ω  
Bridge voltage: Fixed at 2 V  
Gauge factor: 2.00 (with scaling function)  
Strain balance: Electronic auto-balancing (can be turned on or off in each module) within ±10,000 με (1/4bridge)

**Pulse Measurement Modules**

Model	Number of Channels	Type of Terminal	Measurement Interval
DU600-11	10	Screw	0.5 s*

\*: Rate of data update is fixed at one-second interval.

● General Specifications

Input method: Shared common line within the same module  
Type of input: Non-voltage contact or open collector (TTL or transistor)  
Measurement modes  
RATE (count value instantaneous mode): The number of pulses input during the most recent one-second period of measurement is output as the scale set value.  
GATE (ON time instantaneous mode): The ON (make)/OFF (break) state (ON = 1, OFF = 0) of the contact input during the most recent one-second period of measurement is output as the scale set value.  
Pulse integration: The computation function is used when integrating either the count value each second or the ON period.  
Computation formula: TLOG.PSUM (XXX)  
Number of computation channels: Max. 60 channels  
Max. count value/ON period: 99999999  
(/M1 (computation option) need not be specified for the DA100 or DR recorder main unit. Pulse integration can be used automatically when a pulse module is recognized.)  
Maximum input frequency: 6 kP/s (10 P/s for voltage-free contact)  
Filter: For rejection of chattering up to 5 ms (can be turned on and off for every channel)

**Digital Input Module**

Model	Number of Channels	Type of Terminals	Measurement Interval
DU700-11	10	Screw	0.5 s

● General Specifications

Input method: Unbalanced floating-point, with channel-to-channel isolation (individually separated channels)  
Measuring range: Voltage input 2.3 V or less ..... 0  
2.5 V or greater ..... 1  
Voltage-free contact input Off (open) ..... 0  
On (closed) ..... 1  
Maximum input voltage range: Voltage input ±60 V DC  
Voltage-free contact input ±10 V DC

**Alarm, DI/DO and Other Modules**

**Alarm Contact Output Modules**

Model	Number of Outputs	Contact Arrangement	Type of Terminal
DT200-11	4	SPDT (NO-C-NC)	Screw
DT200-21	10	Make contact (NO-C)	Screw

● General Specifications

Output mode: Selection between excitation and non-excitation, output hold and non-hold and AND and OR modes  
Re-breakdown re-alarm: Maximum of 6 contacts can be selected.  
Contact capacity: 250 VDC/0.1 A (resistive load)  
30 VDC/2 A (resistive load)  
250 VAC/2 A (resistive load)

**DI/DO Modules**

● Common Specifications  
Model: DT100-11  
The DR242 expandable model incorporates fail and chart-end output as standard features. (Up to 1 module can be connected to the DR240 expandable model.)  
● Alarm Contact Output  
Number of outputs: 2  
Contact mode: SPDT—NO-C-NC terminal  
Contact capacity: 250 VDC/0.1 A (resistive load)  
30 VDC/2 A (resistive load)  
250 VAC/2 A (resistive load)  
● Chart End Output  
Outline of functions: The chart end output terminal is energized if the recording paper in the recorder breaks.  
The DR stand-alone model uses the /R1 option.  
Contact mode: Make contact (NO-C). Cannot be switched between excited and non-excited.  
Contact capacity: 250 VDC/0.1 A (resistive load)  
30 VDC/2 A (resistive load)  
250 VAC/2 A (resistive load)

● **Fail Output**

Function: If an abnormality is found in the total system, the fail output terminal is de-energized.  
 Output mode: Make contact (NO-C). Cannot be switched between excited and non-excited.

Contact capacity: 250 VDC/0.1 A (resistive load)  
 30 VDC/2 A (resistive load)  
 250 VAC/2 A (resistive load)

● **Remote Control Signal Input**

Function: Start and stop recording  
 Change chart speed  
 Start message printing  
 Start and stop memory sampling  
 Control statistical calculation interval  
 Input signal: Non-voltage contact or open collector (TTL or transistor)

● **Extension Modules**

Unit to connect with: DS400 or DS600 subunit (one for each subunit)  
 Number of input modules: One input module can be mounted on an extension base unit. Up to 3 extension base units can be connected to one extension module in series.

Type of input modules: 10-ch universal input module  
 10-ch DCV/TC/DI input module

Extensible distance: Up to total length of 30 m

**Communications Modules**

● **Specifications Common to Communications Modules**

● **Functions, Common Specifications**

Outline of functions: Output of measured values, output of set points, setup of measurement conditions, control of start/stop of measurement, etc.

Withstanding voltage: 1,500 VAC (50/60 Hz) for one minute between output terminal and ground

● **GP-IB Modules**

Electrical and mechanical specifications: Based on IEEE standard 488-1978  
 Addresses: 0 to 15

● **RS-232C Modules**

Electrical and mechanical specifications: Based on EIA RS-232C  
 Communications format: Half duplex  
 Synchronization: Start-stop synchronization (synchronization by means of the start and stop bits)  
 Baud rate: 150, 300, 600, 1200, 2400, 4800, 9600, 19200 or 38400 bps  
 Transmission distance: Maximum of 15 m  
 Connector: D-sub 25-pin connector

● **RS-422A/485 Modules**

Electrical and mechanical specifications: Based on EIA RS-422A and EIA RS-485  
 Connection method: Multi-drop  
 Address: 1 to 31  
 Communications format: Half-duplex, 4-wire method/2-wire method  
 Synchronization: Start-stop synchronization (synchronization by means of start and stop bits)  
 Baud rate: 300, 600, 1200, 2400, 4800, 9600, 19200 or 38400 bps  
 Transmission distance: Maximum of 1200 m  
 Connector: 6-screw terminal

● **Ethernet Modules**

Network configuration: Ethernet (10Base-T)  
 10Base-T modular connector: 1  
 Baud rate: 10 Mbps  
 Communication protocol: TCP, UDP, IP, ARP or ICMP  
 Input data: ASCII  
 Output data: ASCII or binary

■ **Model and Suffix Codes**

**DR240 Stand-alone model**

Model	Suffix code	Description	
DR241		Panel mount type hybrid recorder	
Memory	-0	No memory	
	-1	3.5-inch FD	
Software	0	No DAQ32 software	
	2	DAQ32 software included	
Input channel	-1	10 ch	
	-2	20 ch	
	-3	30 ch	
Input	1	Universal input, screw	
	2	Universal input, clamp	
	3	DCV/TC/DI input screw	
	4	DCV/TC/DI input clamp	
Power supply voltage	-1	100 to 240 VAC	
	-2	12 to 28 VDC (DC power supply only)	
Power inlet, power cable	W	Screw terminal	
	Y	Screw terminal for DC power supply (w/o power cord)	
Additional specifications	/M1	Computing functions	
	/M3	Report function	
	/C1	GP-IB	
	/C2	RS-232C	
	/C3S	RS-422/485 (screw)	Must not coexist
	/C7	Ethernet	
	/N7	Power monitor for single phase	
	/N8	Power monitor for 3 phase	Must not coexist
	/A4	Alarm output module (A type 10 contacts)	
	/R1	2-point alarm output, remote control signal input, fail output, and chart end output	
/H1	Internal illumination		
/D2	*F display		

- The maximum allowable number for the / N □ / C □ / A4 and / R1 options is determined according to the specified channel number.  
 10 ch: All options can be specified.  
 20 ch: All of them can be specified.  
 30 ch: 3 of them can be specified.
- When "-0" of the memory code is selected, "0" of the software code must be always specified.  
 No data conversion software is provided with the unit.

**DR240 Expandable model**

Model	Suffix codes	Description
DR242		Panel mount type hybrid recorder
Memory	-0	No memory
	-1	3.5-inch FD
Data conversion	0	No DAQ32 software
	2	DAQ32 software included
Input	-00	Always -00
Power supply voltage	-1	100 to 240 VAC
Power inlet, power cable	W	Screw terminal
Additional specifications	/M1	Computing functions
	/M3	Report function
	/H1	Internal illumination
	/D2	*F display

- Subunits and input/output modules must be ordered separately from the main unit.
- The extension cable must be ordered separately when the subunit is specified.

**Subunit: DS400, DS600**

Model	Suffix codes	Description
DS400		4-module connection type subunit
DS600		6-module connection type subunit
Type	-00	Always -00
Power supply voltage	-1	100 to 240 VAC
Power inlet, power cable	D	3-pin power inlet w/UL, CSA cable
	F	3-pin power inlet w/VDE, cable
	R	3-pin power inlet w/SAA, cable
	S	3-pin power inlet w/BS, cable
	W	With 3-pin inlet screw conversion terminal

**Configuration example of the expandable model**

- 100 ch, 0.5 s universal input, with RS-232C and 20-ch alarm output
- DR240 expandable main-unit: DR242 × 1
- Sub unit: DS600 × 2
- Universal input module: DU100-11 or -12 × 10
- Communication module: DT300-21 (RS-232C) × 1
- Alarm output module: DT200-21 × 2
- Extension cable × 2

## Input modules

Model	Description	Required slots	Terminal profile	Max. measuring period
DU100-11	10-channel universal input (DCV, TC, DI & RTD)	1	Screw	0.5 s
DU100-21	20-channel universal input (DCV, TC, DI & RTD)	2	Screw	2 s
DU100-31	30-channel universal input (DCV, TC, DI & RTD)	3	Screw	2 s
DU100-12	10-channel universal input (DCV, TC, DI & RTD)	1	Clamp	0.5 s
DU100-22	20-channel universal input (DCV, TC, DI & RTD)	2	Clamp	2 s
DU100-32	30-channel universal input (DCV, TC, DI & RTD)	3	Clamp	2 s
DU200-11	10-channel DCV/TC/DI input	1	Screw	0.5 s
DU200-21	20-channel DCV/TC/DI input	2	Screw	2 s
DU200-31	30-channel DCV/TC/DI input	3	Screw	2 s
DU200-12	10-channel DCV/TC/DI input	1	Clamp	0.5 s
DU200-22	20-channel DCV/TC/DI input	2	Clamp	2 s
DU200-32	30-channel DCV/TC/DI input	3	Clamp	2 s
DU300-11	10-channel mA input module	1	Screw	0.5 s
DU300-12	10-channel mA input module	1	Clamp	0.5 s
DU400-12	Power monitor module for single phase	1	Clamp	2 s
DU400-22	Power monitor module for 3 phase	1	Clamp	2 s
DU500-12	10-channel strain input module (120 Ω)	2	Clamp	0.5 s
DU500-13	10-channel strain input module (350 Ω)	2	Clamp	0.5 s
DU500-14	10-channel strain input module (External bridge box)	2	NDIS	0.5 s
DU600-11	10-channel pulse input	1	NDIS	0.5 s
DU700-11	Digital input	1	Screw	0.5 s

## I/O terminal module

Model	Description
DT100-11	DI/DO module (2-point alarm output, remote control signal input, fail/chart end output)
DT200-11	Alarm output module (4 transfer contacts)
DT200-21	Alarm output module (10 make contacts)
DT300-11	GP-IB module
DT300-21	RS-232C module
DT300-31	RS-422/485 module
DT300-41	Ethernet module

## Optional accessories

Model	Description
DV100-011	Extension module
DV100-012	Extension base unit
DV200-000	Extension cable (0.5 m)
DV200-001	Extension cable (1 m)
DV200-002	Extension cable (2 m)
DV200-005	Extension cable (5 m)
DV200-010	Extension cable (10 m)
DV200-020	Extension cable (20 m)
DV200-050	Extension cable (50 m)
DV200-100	Extension cable (100 m)
DV200-200	Extension cable (200 m)
DV200-300	Extension cable (300 m)
DV200-400	Extension cable (400 m)
DV200-500	Extension cable (500 m)
DV250-001	Cable adapter
DV300-011	Shunt resistor 10 Ω, for screw
DV300-012	Shunt resistor 10 Ω, for clamp
DV300-101	Shunt resistor 100 Ω, for screw
DV300-102	Shunt resistor 100 Ω, for clamp
DV300-251	Shunt resistor 250 Ω, for screw
DV300-252	Shunt resistor 250 Ω, for clamp
DV400-011	Rack mounting kit (DS400/600)
DV400-051	Power cable between DR expandable main unit and subunit
DV450-001	Strain converter

## Software

Model	Description	Applicable Operating System
DP120-13	DARWIN DAQ32 software (Supports setup, simplified data logging and viewing, and diagnosis and calibration functions. One package of this software comes standard with the purchased DR240 recorder if you specify the model code specification for "software included.")	Windows 95, Windows 98 or Windows NT4.0
DP320-13	DARWIN DAQ32Plus software (Supports setup, data logging and viewing, diagnosis and calibration and tag setting functions.)	Windows 95, Windows 98 or Windows NT4.0
DP350-13	Enhanced multifunctional data logging software	Windows 3.1, Windows 95 or Windows 98
DP380-13	Report software	Windows 3.1, Windows 95 or Windows 98
DP800-□E	"InTouch for DARWIN" data logging software for process use (Choices for the □ field: 1 = 40 channels; 2 = 120 channels; 3 = 300 channels)	Windows 95 or Windows NT4.0

The DP120 (DAQ32) and DP320 (DAQ32Plus) data acquisition software cannot be run simultaneously, and neither can the combination of the DP350 enhanced multi-functional data logging software, DP380 report software and DP800 InTouch for DARWIN software.


## Spares

Part No.	Name	Order q'ty
B9627AZ	10-color ribbon	1
B9627RY	Z-fold paper (30 m) (time axis:10 mm)	10
B9627AY	Z-fold paper (30 m) (time axis:25 mm)	10

- Standard accessories for the DR240

One Z-fold chart paper, one ink ribbon, one pair of panel mounting brackets, instruction manuals.

## External Dimensions (DR242 with DS600 subunit on the rear panel)

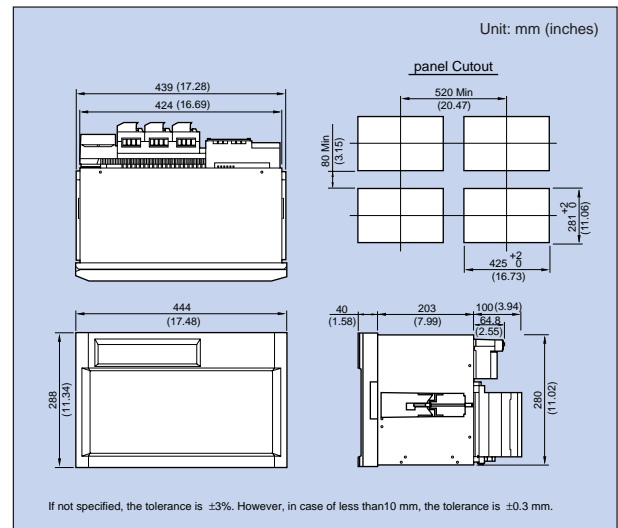

Excal, Windows, MS and MS-DOS are registered trademarks of Microsoft Corporation, USA.  
 IBM and IBM PC/AT are registered trademarks of International Business Machines Corp.  
 Lotus 1-2-3 is a registered trademark of Lotus Development Corporation.  
 AT-GPIB and GPIB-98 Turbo are registered trademarks of National Instruments.  
 Ethernet is a registered trademark of Xerox Corporation.

Other company and/or product names are registered trademarks of the respective companies.