SPECIAL FEATURES: NONE

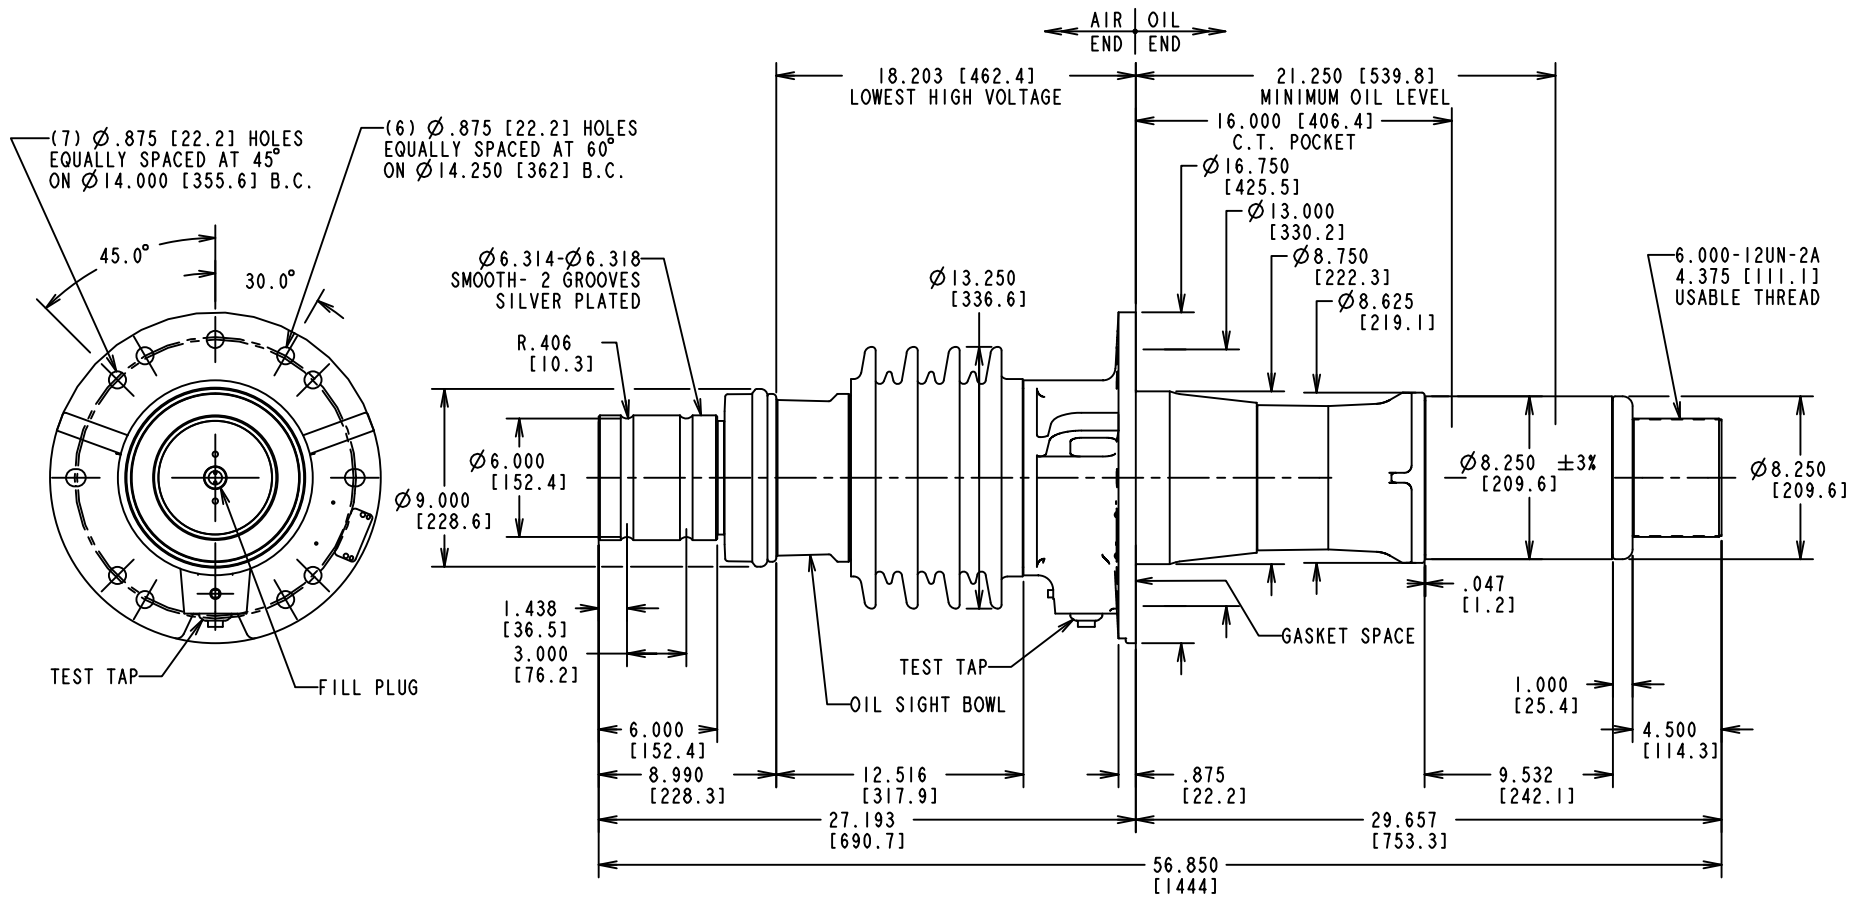

STYLE NO.	CATALOG NO.	OUTER INSULATING ENVELOPE COLOR	INSULATION CLASS kV	BASIC IMPULSE LEVEL kV	MAX. LINE TO GROUND VOLTAGE kV	CONNECTION METHOD AND CONTINUOUS CURRENT A@60Hz			MINIMUM CREEP DISTANCE in. / [mm]	MINIMUM ARCING DISTANCE in. / [mm]	MAXIMUM ALTITUDE ft / [m]	MOUNTING ANGLE FROM VERTICAL deg	APPROX. WEIGHT lb / [kg]
						DRAW-LEAD	INBOARD END						
							TRANS.	O.C.B.					
025W6000RC	N/A	GRAY	25	150	16	N/A	6000	N/A	29.188 [741]	12.516 [318]	10000 [3048]	0 TO 20	342 [155.1]
025X6000RC	N/A	BROWN											

REVISIONS

NO. & LOC.		
2	CA62250, D-4A0502 REDRAWN ON CADD WITH DIMENSIONAL CORRECTIONS. J.ARMIGER 04/22/03 D.GEIBEL 04/22/03	
3	CB04899, CSR# 0710111 MIN ARCH DIST WAS 12.468, ADDED LOWEST HIGH VOLTAGE DIM. OVERALL LNGTH WAS 56.812, B DIM WAS 27.155 M. WILLIAMS 12/12/07 E. WILLER 12/13/07	

PRINTS TO:

1		7		13	
2		8		14	
3		9		15	
4		10		16	
5		11		17	
6		12		18	
REF:					

ABB Inc.
ALAMO, TN U.S.A.

TITLE: TYPE O Plus C™, IEEE, CONDENSER BUSHING

P/E FILE KEY: LNI GEN ASSEM

RESP. DEPT.: BUSHINGS

DFTR: J.ARMIGER 22-Apr-03

CHKD:

APPD:

UNITS = in./[mm]

SCALE = 0.219

LANG. = ENGLISH

DRAWING NO: T025W6000RC

REV.: 3

SHEET 1 OF 1

WE RESERVE ALL RIGHTS IN THIS DOCUMENT AND IN THE INFORMATION CONTAINED THEREIN. REPRODUCTION, USE OR DISCLOSURE TO THIRD PARTIES WITHOUT EXPRESS AUTHORITY IS STRICTLY FORBIDDEN. © ABB.